




**EXITFLEX SA**  
 CH-1196 GLAND  
 SWITZERLAND  
 Tel.: +41-22 364 30 55  
 Fax: +41-22 364 25 05  
 exit-flex\_sa@swissonline.ch  
 http://www.exitflex.com



MANUFACTURER OF QUALITY HIGH PRESSURE HOSES AND TUNGSTEN CARBIDE SPRAY TIPS

DATA SHEET 63-597/1

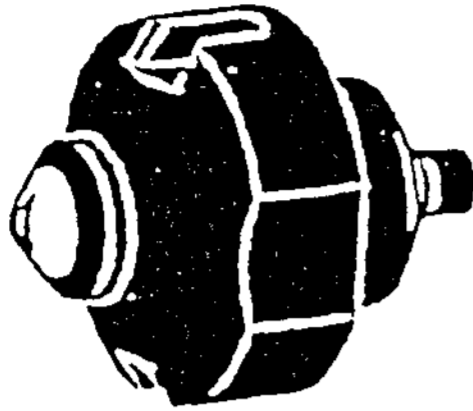

**"AW" PATTERN BLACK PLASTIC  
 AIR ASSISTED AIRLESS SPRAY TIP**

**To Order : Part No 63-597/1 and state size i.e. 11/40**

Nozzle Marking	Tip size mm / inch	Spray fan angle °	Flow rate 1)	Fan width 2)
07.40	0,18-0,007	40°	0,19	175
09.10	0,23-0,009	10°	0,25	76
09.20	0,23-0,009	20°	0,26	140
09.40	0,23-0,009	40°	0,26	190
09.50	0,23-0,009	50°	0,26	215
09.60	0,23-0,009	60°	0,26	255
11.10	0,28-0,011	10°	0,38	76
11.20	0,28-0,011	20°	0,38	140
11.40	0,28-0,011	40°	0,38	190
11.50	0,28-0,011	50°	0,38	215
11.60	0,28-0,011	60°	0,38	235
11.80	0,28-0,011	80°	0,38	292
13.10	0,33-0,013	10°	0,57	76
13.20	0,33-0,013	20°	0,57	140
13.40	0,33-0,013	40°	0,57	200
13.50	0,33-0,013	50°	0,57	230
13.60	0,33-0,013	60°	0,57	260
13.80	0,33-0,013	80°	0,57	330
15.10	0,38-0,015	10°	0,72	100
15.20	0,38-0,015	20°	0,72	150
15.40	0,38-0,015	40°	0,72	210
15.50	0,38-0,015	50°	0,72	255
15.60	0,38-0,015	60°	0,72	275
15.80	0,38-0,015	80°	0,72	355
18.20	0,46-0,018	20°	1,14	150
18.40	0,46-0,018	40°	1,14	250
18.50	0,46-0,018	50°	1,14	255
18.80	0,46-0,018	80°	1,14	380
21.20	0,53-0,021	20°	1,56	150
21.40	0,53-0,021	40°	1,56	270
21.50	0,53-0,021	50°	1,56	290
21.80	0,53-0,021	80°	1,56	430
26.50	0,66-0,026	50°	2,32	305
31.50	0,79-0,031	50°	3,50	305
36.50	0,91-0,036	50°	4,56	305

- 1) Flow rate (in l/min) of water at 100 bar.
- 2) Spray fan width (in mm) at approximately 30cm from object, with gloss paint viscosity 20 DIN seconds at 100 bar pressure

All recommendations and suggestions appearing in this bulletin concerning the use of our products are based upon tests and data believed to be reliable. Since the actual use by others is beyond our control, no guarantee expressed or implied, is made by Exit S.A., its subsidiaries, affiliates and distributors, as to the effects of such use or the results to be obtained, nor is any information to be construed as a recommendation to infringe any patent.