

TRI-A Auto

- ✓ 140 Bar MWP (2000psi)
- ✓ accepts TRI-A reversible kit
- ✓ 1/4 BSP fluid connection
- ✓ CE marked




TRI-A Spray Gun Models

| TYPE REF | DESCRIPTION |
|----------|-------------|
|----------|-------------|

| | |
|--------|---|
| 83-600 | AUTOMATIC TRI-A AIR ASSISTED AIRLESS SPRAY GUN 140 Bar MWP (2000psi). Includes a mounting base with air and fluid fittings and connections. Compact and durable. Teflon packings and stainless steel fluid passages. Accepts TRI-A 83-005 reversible nozzle system (not included as standard) |
|--------|---|

The TRI-A air assisted airless spray gun in association with the TRI-A reversible spray tip system is suitable for use in demanding industrial applications. The features of the gun and air cap/nozzle combination provide many benefits to the user; reduced down-time due to reversible cleaning nozzles and ease of servicing, compact, durable anodised body, superb atomisation and fan control. TwinTips also available giving 2 angles back-to-back from 1 tip key.

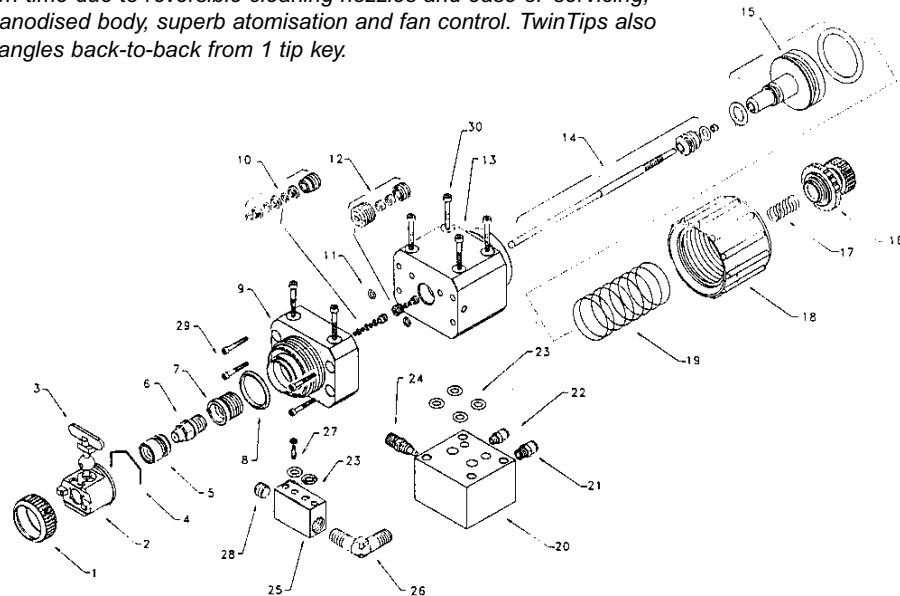

| Pos. | Ref | Description |
|------|--------|-----------------------------|
| 3 | 83-603 | Head |
| 4 | 83-604 | Needle Packing Kit |
| 5 | 83-605 | Air Valve Kit |
| 6 | 83-606 | Body |
| 7 | 83-607 | Fluid Inlet Connection Body |
| 10 | 83-610 | Air Inlet Base Control |
| 11 | 83-611 | Air Piston Assembly |
| 12 | 83-612 | Piston Spring |
| 13 | 83-613 | Cylinder Cap |
| 14 | 83-614 | Needle Spring |
| 15 | 83-615 | Needle Adjuster Assembly |

| Pos. | Ref | Description | |
|------|--------|-------------------------------|-----------|
| 22 | 83-403 | Air Cap Separation Gasket | |
| | 83-000 | Repair Kit | |
| | | Comprising: | |
| | | 3 x 'O' Rings | ref 3b) |
| | | 1 x 'O' Ring | (ref 11a) |
| | | 1 x 'O' Ring | (ref 11b) |
| | | 1 x Piston Spring | (83-612) |
| | | 1 x Needle Spring | (83-614) |
| | | 6 x 'O' Rings | (ref 10a) |
| | | 1 x Air Cap Separation Gasket | (83-403) |